

VERTICAL SERIES WITH FOLDED BASE AND ANTI-RELEASE LEVER

Some sizes of this series are also produced in stainless steel and are shown below in red.

Material:

Galvanized steel or **AISI 304 stainless steel**

Riveted pivots:

Galvanized steel or **AISI 304 stainless steel**

Supporting bushes:

Hardened and ground steel.

Handles:

Red polyurethane resistant to oils, grease and other chemical agents.

Performance:

Form AL and **form ALX** with open clamping lever and two flanged washers.


Form EL and **form ELX** with full clamping lever and bolt retainers to be welded in the desired position and angle.

Spindles:

To be ordered separately (see Accessories on page 87).

Features and applications:


The main feature of this series is the special anti-release lever with the purpose of avoiding any accidental openings caused by vibrations; and to block the tool in the open position; these tools are designed to prevent the operator's fingers from being crushed by the levers when opening. During the closing, the clamping lever is guided laterally to ensure greater stability against possible transverse stresses. A special grease is placed between two contacting surfaces during assembly.



FORM AL




PATENTED

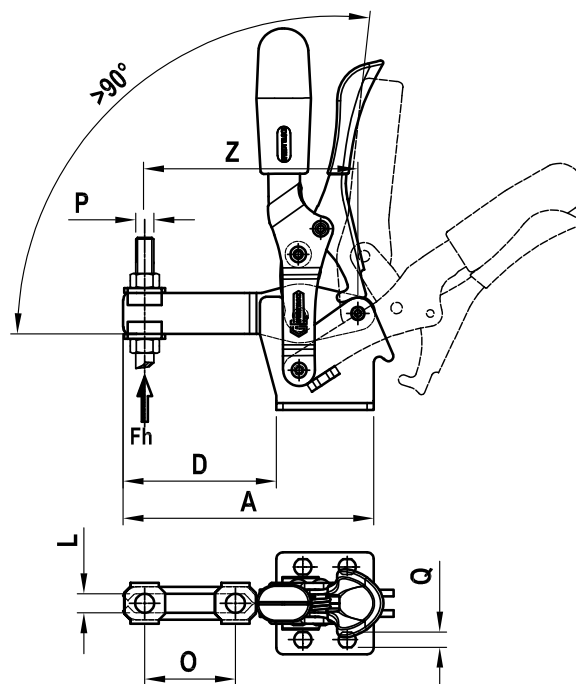

FORM EL



PATENTED

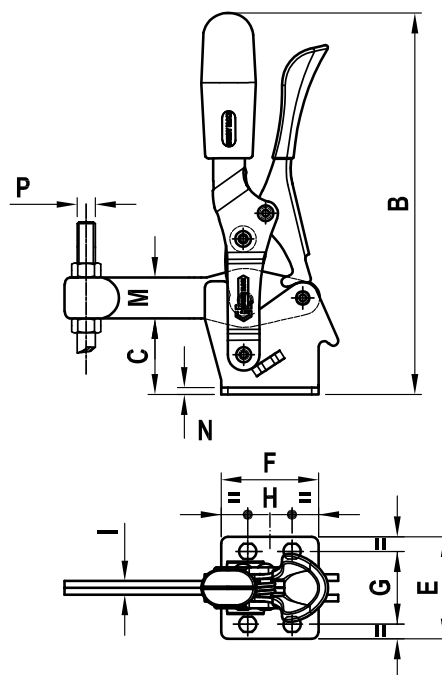

Code	Description	Stainless steel Code	Description	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	Z	Fh (daN)	gr.
AA582	130/AL	AS200	130/ALX	85	142	28	50	42	35	27÷29	12,5÷19		6,2	16	2,5	28	M6	5,6	71	105	275
AA586	130/EL	AS204	130/ELX	86	142	28	51	42	35	27÷29	12,5÷19	5		16	2,5		M6	5,6		105	280
AA590	230/AL	AS210	230/ALX	110,5	168	33,5	67,5	45	43	32	18÷21		8,5	18	3	40	M8	6,7	94	200	380
AA594	230/EL	AS214	230/ELX	112	168	33,5	69	45	43	32	18÷21	6		18	3		M8	6,7		200	390