

## DOUBLE ROD SERIES (LIGHT PERFORMANCE).

The sizes of this series are also produced in stainless steel and are shown below in red.

### Material:

Galvanized steel or

**AISI 304 stainless steel**

### Riveted pivots and rod:

Galvanized steel or **AISI 304 stainless steel**

### Swinging pivot:

Galvanized steel or **AISI 303 stainless steel**

### Handles:

Red polyurethane resistant to oils, grease and other chemical agents.

### Performance:

The tool comes with a double bar with hooking bracket and nuts.

In addition to the standard length of the U rods, a variety of other lengths are given on page 57.

Therefore, when ordering, indicate:

**T2 or T2X** = Tool with Standard Double Threaded Rod and hooking bracket

**T20 or T20X** = Tool without double Threaded rod, which is to be ordered separately (see page 57)

### Features and applications:




The tools of this series ensure a perfect closing of lids.

The support base is perpendicular to the force line of action.


In the closed position, the control lever is parallel to the support base.

A special grease is placed between two contacting surfaces during assembly.

## FORM T2

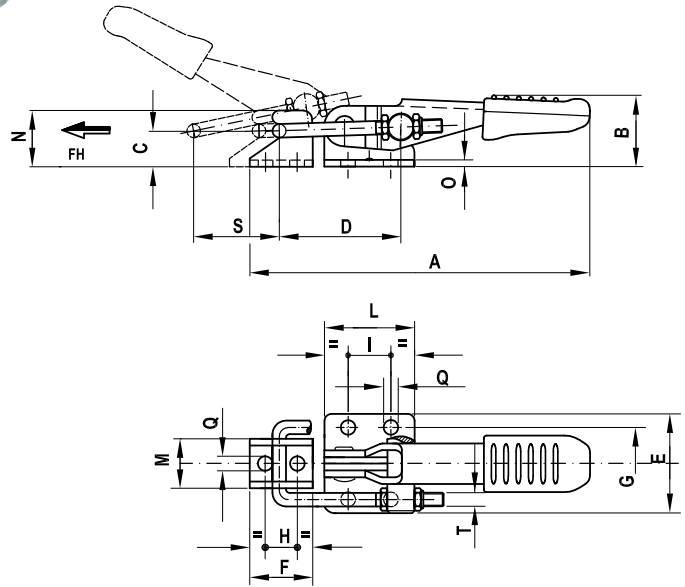

**T2-T2X**



**T20-T20X**

Code	Description	Stainless steel Code	Description	A	B	C	D	E	F	G	H	I	L	M	N	O	Q	S	T	Fh (daN)	gr.
AL500	160/T2	AS500	160/T2X	98	25	12	35÷44	28	20	19	10	16	26	14	18	2	4,3	25	M4	160	85
AL505	320/T2	AS505	320/T2X	152	30	16	54÷63	44	28	32	14,3	19	40	22	25	3	6,5	48	M6	320	250
AL510	700/T2	AS510	700/T2X	220	42	24	70÷90	54	38	38	19	41,5	60	26	36	3,5	8,5	58	M8	750	600

