


FORM T2

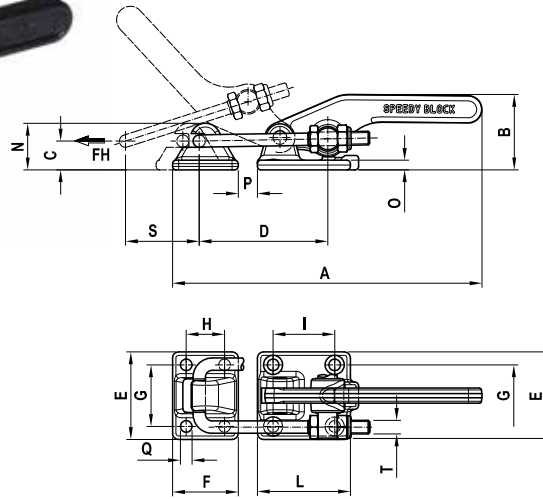

DOUBLE AND WELDABLE DOUBLE ROD SERIES (HEAVY PERFORMANCE)

The sizes of this series are also produced in stainless steel and are shown below in red.

Material:

Hot-stamped, weldable, black varnished steel or **hot-stamped AISI 304 stainless steel**.

Pivot:

Hardened, ground and knurled steel to prevent rotation.

Bar, swinging pivot and nuts:

Galvanized steel or **AISI 303 stainless steel**

Performance:

Form T2 Hot-stamped black varnished steel or **hot-stamped AISI 304 stainless steel**

Form T2S Hot-stamped and phosphated stainless steel or **hot-stamped AISI 304 stainless steel**

The tool comes with a double bar with hooking bracket and nuts.

In addition to the standard length of the U rods, a variety of other lengths are given on page 57.

Therefore, when ordering, indicate:

T2-T2S or T2X-T2SX == Tool with Standard Double Threaded Rod and hooking bracket

T20-T2S0 or T20X-T2S0X == Tool without double Threaded rod, which is to be ordered separately (see page 57)


Features and applications:

The tools of this series ensure a good closure of lids. The construction features and the materials chosen give these tools high resistance qualities.


The support base is perpendicular to the force line of action.

In the closed position, the control lever is parallel to the support base.


A special grease is placed between two contacting surfaces during assembly.





T2-T2X




T20-T20X




FORM T2S

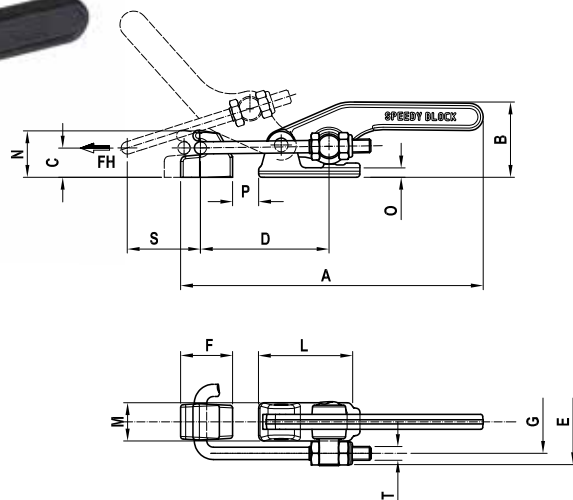

T2S-T2SX



T2S0-T2S0X



| Code | Description | Stainless steel Code | Description | A | B | C | D | E | F | G | H | I | L | N | O | P | Q | S | T | Fh (daN) | FhX (daN) | gr. |
|-------|-------------|----------------------|-------------|-----|----|----|---------|----|----|----|----|----|----|----|---|----|------|-------|-----|----------|-----------|------|
| AL518 | 1700/T2 | AS518 | 1700/T2X | 226 | 55 | 21 | 94-106 | 64 | 48 | 45 | 28 | 45 | 68 | 34 | 7 | 14 | 8,5 | 54-58 | M10 | 1700 | 1400 | 1085 |
| AL522 | 4000/T2 | AS522 | 4000/T2X | 282 | 68 | 27 | 112-124 | 80 | 60 | 57 | 35 | 57 | 85 | 42 | 9 | 14 | 10,5 | 62-65 | M12 | 4000 | 3000 | 2070 |

| Code | Description | Stainless steel Code | Description | A | B | C | D | E | F | G | L | M | N | O | P | S | T | Fh (daN) | FhX (daN) | gr. |
|-------|-------------|----------------------|-------------|-----|----|----|---------|----|----|----|----|------|------|---|----|-------|-----|----------|-----------|------|
| AL520 | 1700/T2S | AS520 | 1700/T2SX | 221 | 55 | 21 | 94-106 | 64 | 38 | 46 | 68 | 26,5 | 34,5 | 7 | 19 | 54-58 | M10 | 1700 | 1400 | 1085 |
| AL524 | 4000/T2S | AS524 | 4000/T2SX | 277 | 68 | 27 | 102-124 | 80 | 50 | 55 | 85 | 32 | 43 | 9 | 19 | 62-65 | M12 | 4000 | 3000 | 2070 |