




FORM T6

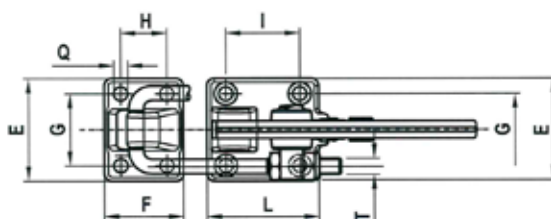

PATENTED

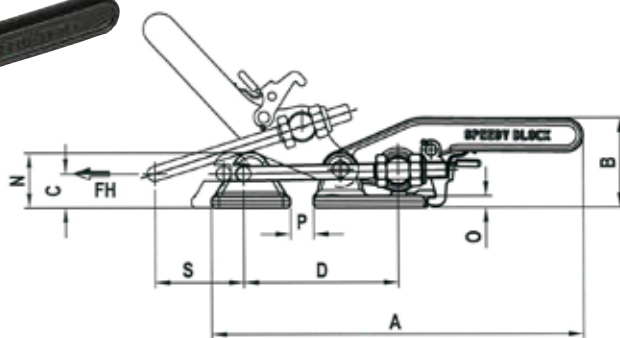


T6-T6X






T60-T60X


FORM T6S

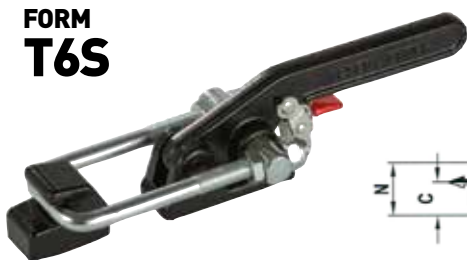


PATENTED

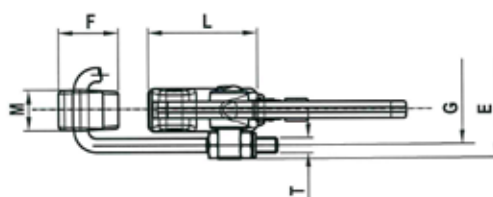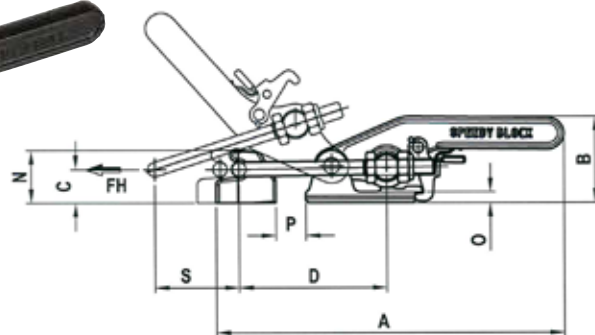

T6S-T6SX



T6S0-T6S0X



DOUBLE AND WELDABLE DOUBLE ROD WITH SAFETY LEVER SERIES (HEAVY PERFORMANCE)

The sizes of this series are also produced in stainless steel and are shown below in red.

Material:

Hot stamped, weldable, black varnished steel or hot stamped **AISI 304** stainless steel.

Pivot:

Hardened, ground and knurled steel to prevent rotation.

Bar, swinging pivot and nuts:

Galvanized steel or **AISI 303 stainless steel**

Performance:

Form T6 hot stamped, black varnished steel or hot stamped **AISI 304** stainless steel.

Form T6S hot stamped, and phosphated steel or hot stamped **AISI 304** stainless steel.

The tool comes with a double bar with hooking bracket and nuts.

In addition to the standard length of the U rods, a variety of other lengths are given on page 57.

Therefore, when ordering, indicate:

T6-T6S or T6X-T6SX = Tool with Standard Double Threaded Rod and hooking bracket

T60-T6S0 or T60X-T6S0X = Tool without double Threaded rod, which is to be ordered separately (see page 57).

Features and applications:

The tools of this series ensure a perfect closing of lids.

The construction features and materials chosen make these tools highly resistant.

The support base is perpendicular to the force line of action.

In the closed position, the control lever is parallel to the support base.

A special grease is placed between two contacting surfaces during assembly.

Code	Description	Stainless steel Code	Description	A	B	C	D	E	F	G	H	I	L	N	O	P	Q	S	T	Fh (daN)	FhX (daN)	gr.
AL795	1700/T6	AS615	1700/T6X	226	55	21	94÷106	64	48	45	28	45	68	34	7	14	8,5	54÷58	M10	1700	1400	1110
AL800	4000/T6	AS620	4000/T6X	282	68	27	112÷124	80	60	57	35	57	85	42	9	14	10,5	62÷65	M12	4000	3000	2100

Code	Description	Stainless steel Code	Description	A	B	C	D	E	F	G	L	M	N	O	P	S	T	Fh (daN)	FhX (daN)	gr.
AL805	1700/T6S	AS625	1700/T6SX	221	55	21	94÷106	64	38	46	68	26,5	34,5	7	19	54÷58	M10	1700	1400	1110
AL810	4000/T6S	AS630	4000/T6SX	277	68	27	112÷124	80	50	55	85	32	43	9	19	62÷65	M12	4000	3000	2100