

DOUBLE ROD SERIES (LIGHT PERFORMANCE)

The sizes of this series are also produced in stainless steel and are shown below in red.

Material:

Galvanized steel or **AISI 304 stainless steel**

Riveted pivots and rod: Galvanized steel or **AISI 304 stainless steel**

Swinging pivot:

Galvanized steel or **AISI 303 stainless steel**

Handles:

Red polyurethane resistant to oils, grease and other chemical agents.

Performance:





the tool comes with a double bar with hooking bracket and nuts.

In addition to the standard length of the U rods, a variety of other lengths are given on page 57. Therefore, when ordering, indicate: **T3 or T3X** = Tool with Standard Double Threaded Rod and hooking bracket
T30 or T30X = Tool without double Threaded rod, which is to be ordered separately (see page 57)

Features and applications:

The tools of this series ensure a perfect closing of lids. The support base is perpendicular to the force line of action. In the closed position, the control lever is parallel to the support base. A special grease is placed between two contacting surfaces during assembly.

FORM T3

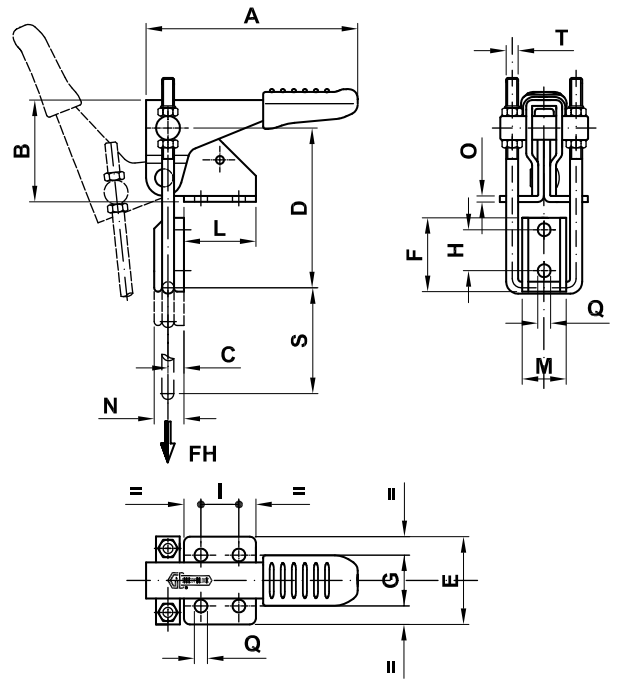

Code	Description	Stainless steel Code	Description	A	B	C	D	E	F	G	H	I	L	M	N	O	Q	S	T	Fh (daN)	gr.
AL530	160/T3	AS530	160/T3X	68	37	5	49,5÷58	35	25,5	22	14,3	13	26	14	10	2	4,3	22÷29	M4	160	100
AL535	320/T3	AS535	320/T3X	106	53	8	75÷95	44	37	25,5	20,5	19	36	22	15	3	6,5	39÷49	M6	320	320
AL540	700/T3	AS540	700/T3X	147	66	13	98÷122	54	48,5	36,5	27	32	52	26	23	3,5	8,5	50÷62	M8	750	680

